






SPECIFICATION	
DESIGNATION	LR621
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	9mAh
TYPICAL WEIGHT	0.28g
TYPICAL VOLUME	0.07cm ³
STORAGE HUMIDITY	45 ~ 75% RH (no condensate)
CUT-OFF VOLTAGE	1.55V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

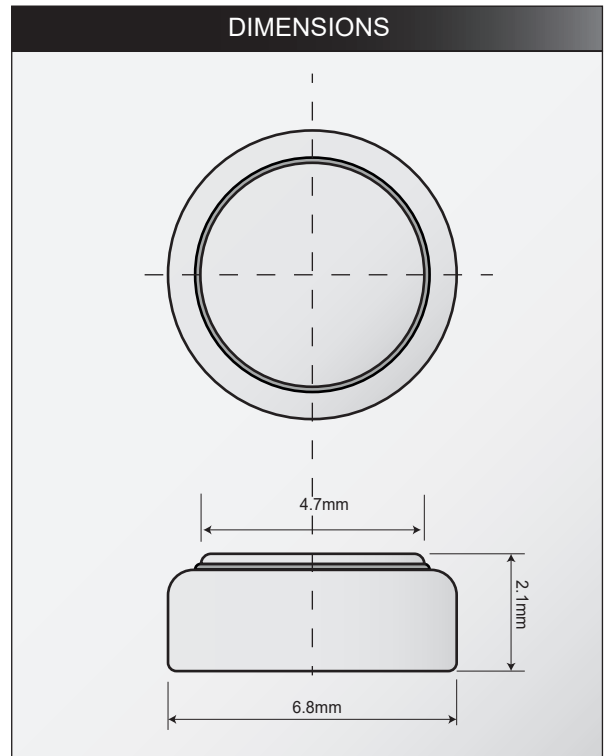

DISCHARGE DIAGRAMS

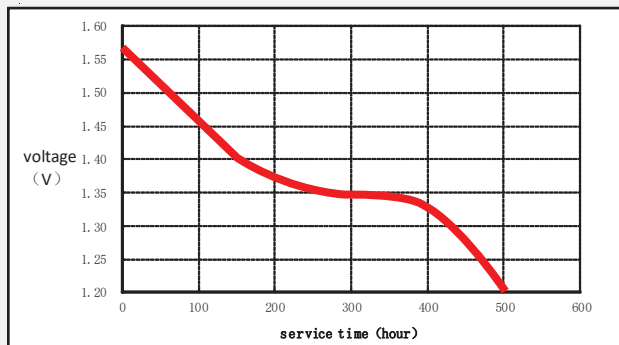

Discharge method: 68 kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C

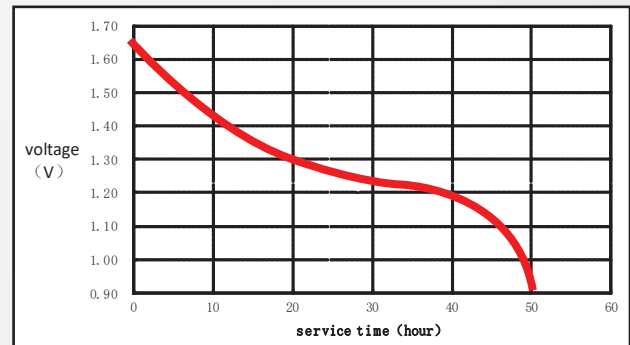

Discharge method: 6.5kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C

STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte


PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	

Important Notice


This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.




SPECIFICATION	
DESIGNATION	LR41
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	28mAh
TYPICAL WEIGHT	0.6g
TYPICAL VOLUME	0.18cm ³
STORAGE HUMIDITY	60 ± 15% RH (no condensate)
CUT-OFF VOLTAGE	0.9V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

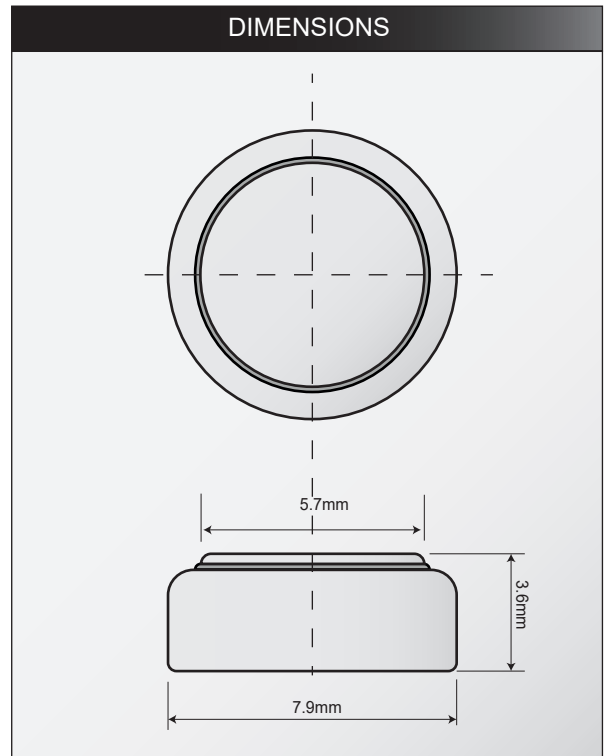

DISCHARGE DIAGRAMS

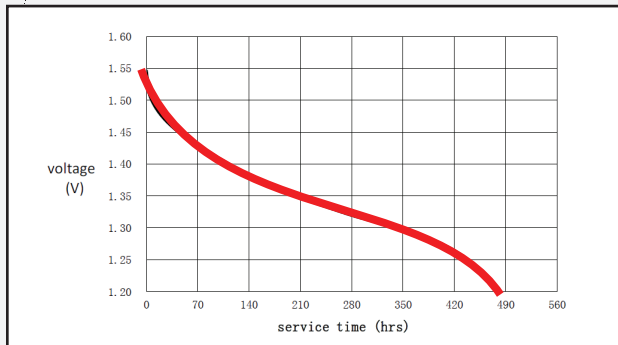

Discharge method: 22kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C

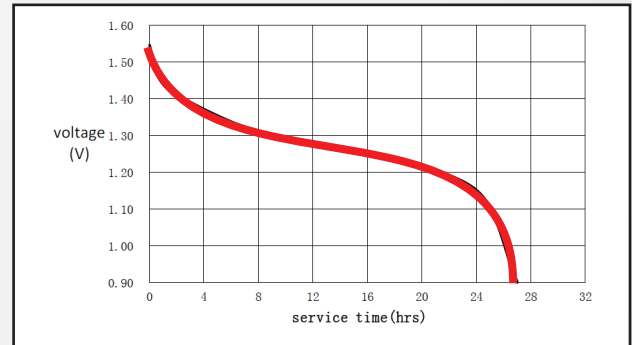

Discharge method: 1 kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C

STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte


PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	

Important Notice


This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.




SPECIFICATION	
DESIGNATION	LR626
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	17mAh
TYPICAL WEIGHT	0.35g
TYPICAL VOLUME	0.1cm ³
STORAGE HUMIDITY	45 ~ 75% RH (no condensate)
CUT-OFF VOLTAGE	1.55V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

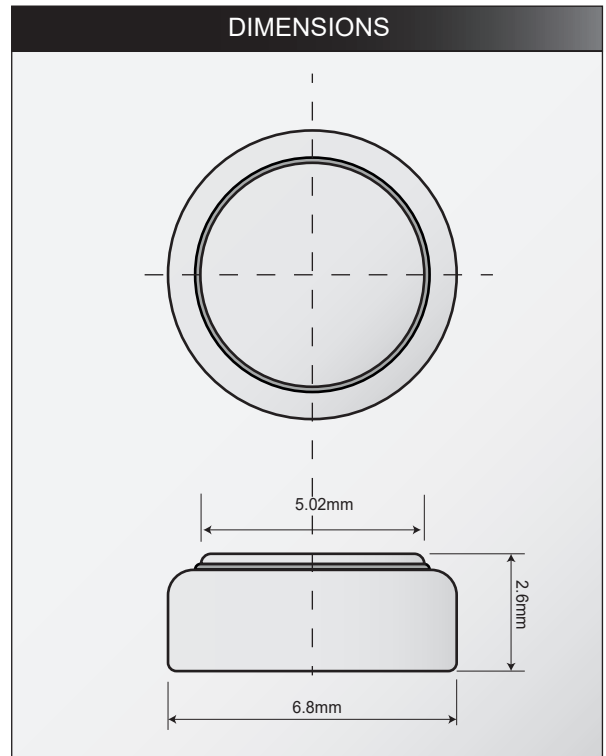

DISCHARGE DIAGRAMS

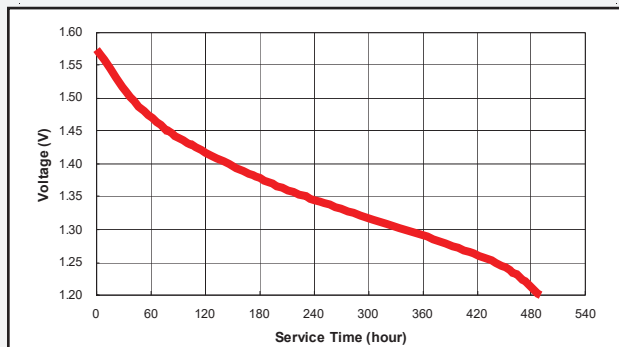

Discharge method: 47 kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C

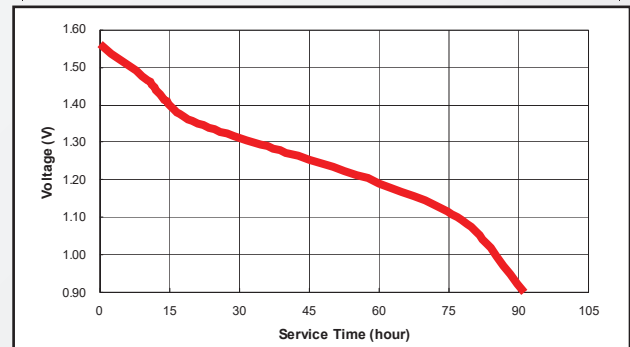

Discharge method: 6.5kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C


STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte


PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	

Important Notice


This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.




SPECIFICATION	
DESIGNATION	LR1130
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	60mAh
TYPICAL WEIGHT	1.14g
TYPICAL VOLUME	0.33cm ³
STORAGE HUMIDITY	60 ± 15% RH (no condensate)
CUT-OFF VOLTAGE	0.9V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

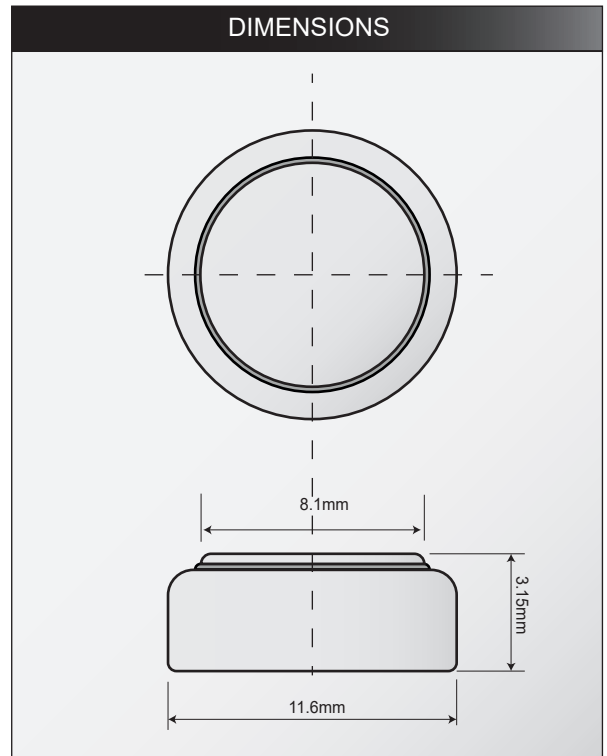

DISCHARGE DIAGRAMS

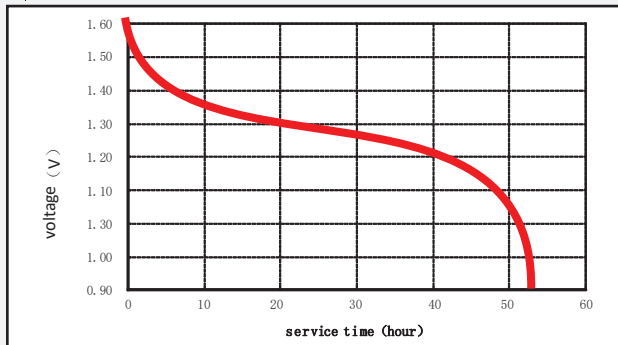

Discharge method: 1 kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C

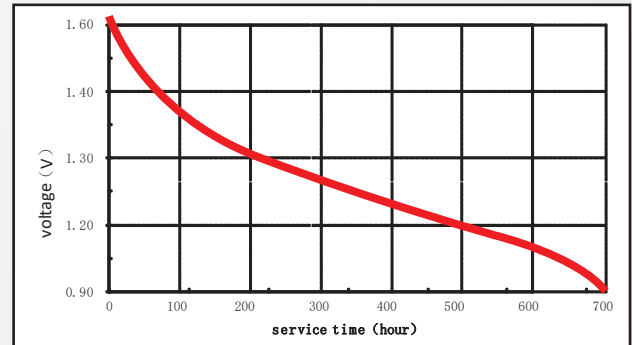

Discharge method: 15 kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C

STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte


PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	

Important Notice

This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.



SPECIFICATION	
DESIGNATION	LR43
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	105mAh
TYPICAL WEIGHT	1.57g
TYPICAL VOLUME	0.44cm ³
STORAGE HUMIDITY	60 ± 15% RH (no condensate)
CUT-OFF VOLTAGE	0.9V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

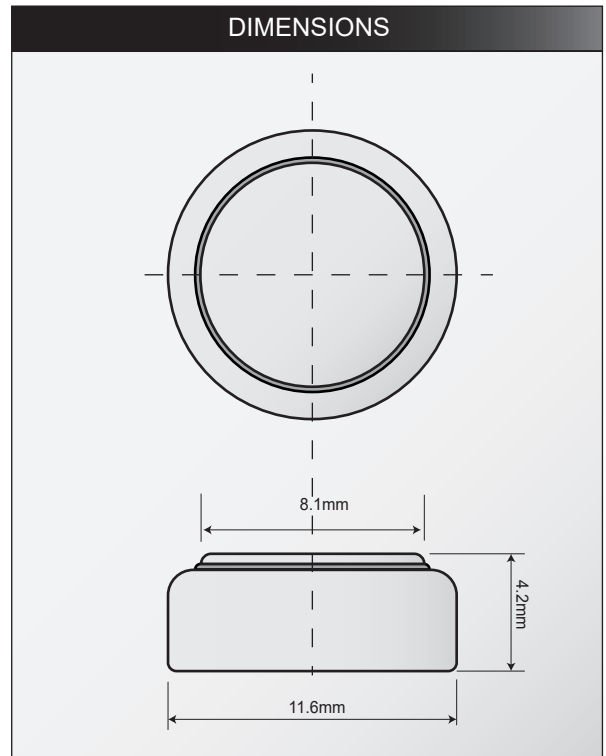

DISCHARGE DIAGRAMS



Discharge method: 10kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C



Discharge method: 1 kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C


STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte

PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	


Important Notice

This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.

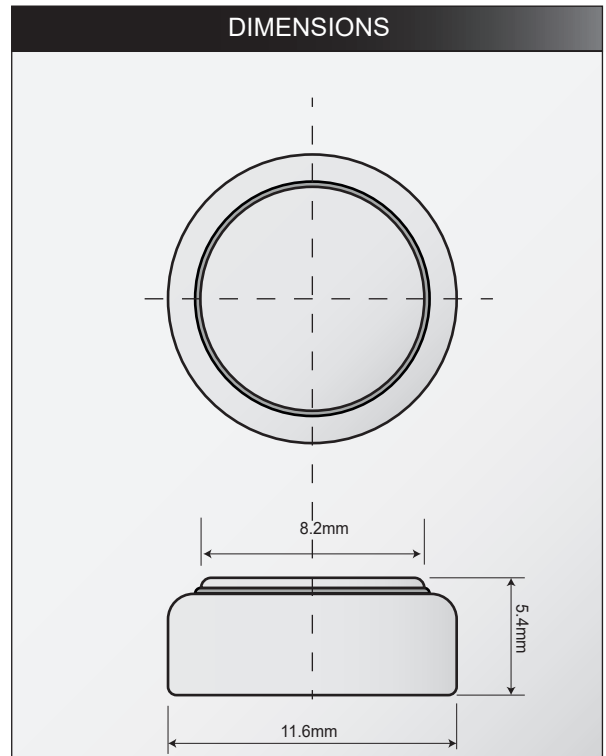


SPECIFICATION	
DESIGNATION	LR44
NOMINAL VOLTAGE	1.5V
TYPICAL CAPACITY	140mAh
TYPICAL WEIGHT	1.92g
TYPICAL VOLUME	0.5cm ³
INSTANT SHORT-CIRCUIT CURRENT	100-120mA
STORAGE HUMIDITY	60 ± 15% RH (no condensate)
CUT-OFF VOLTAGE	0.9V
OPERATING TEMPERATURE RANGE	-18°C~50°C
DISCHARGE TEMPERATURE	20 ± 2°C

DISCHARGE DIAGRAMS

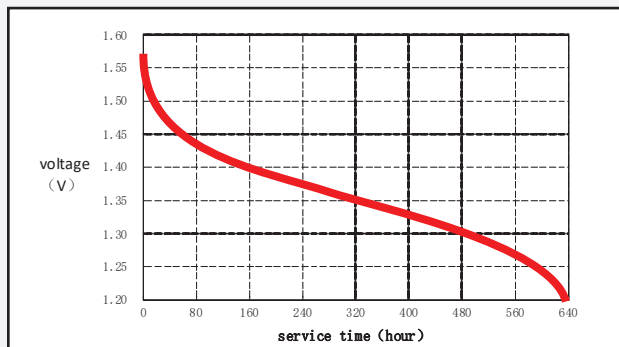

Discharge method: 6.8kΩ, 24hours/day, E.V. 1.2V
Temperature: 20±2°C

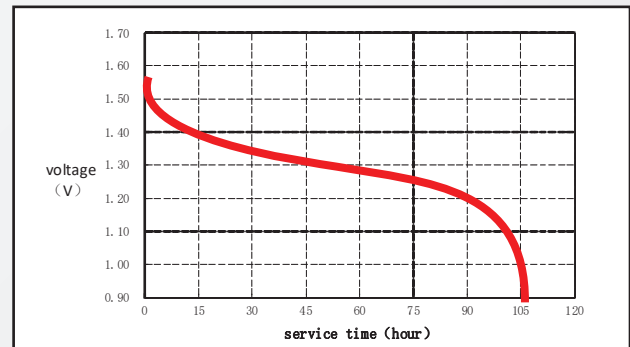

Discharge method: 1kΩ, 24hours/day, E.V. 0.9V
Temperature: 20±2°C

STANDARDS

- IEC 60086-1:2011 – Primary Batteries –Part 1: General
- IEC 60086-2:2011 – Primary Batteries –Part 2: Physical and electrical specifications
- IEC 60086-3:2011 – Primary Batteries –Part 3: Watch batteries
- IEC 60086-5:2011 – Primary Batteries –Part 5: Safety of batteries with aqueous electrolyte

PREPARED BY	CHECKED BY	APPROVED BY
CB	EB	

Important Notice

This specification contains typical information specific to products manufactured at the time of publication.
The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.