

FUJIENER ()Y®



| SPECIFICATION | |
|-----------------------------|---------------------------------|
| DESIGNATION | 6LR61/9V |
| NOMINAL VOLTAGE | 9.0V |
| TYPICAL CAPACITY | 500mAh |
| TYPICAL WEIGHT | 44.0g |
| TYPICAL VOLUME | 22.5cm ³ |
| TERMINALS | Miniature Snap |
| CHEMICAL SYSTEM | Alkaline Zinc-Manganese dioxide |
| STORAGE TEMPERATURE RANGE | <30°C |
| OPERATING TEMPERATURE RANGE | -18°C~50°C |

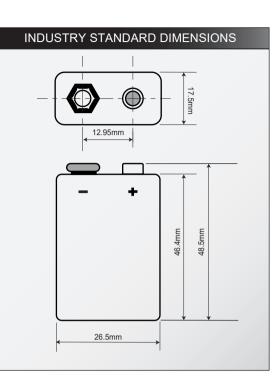

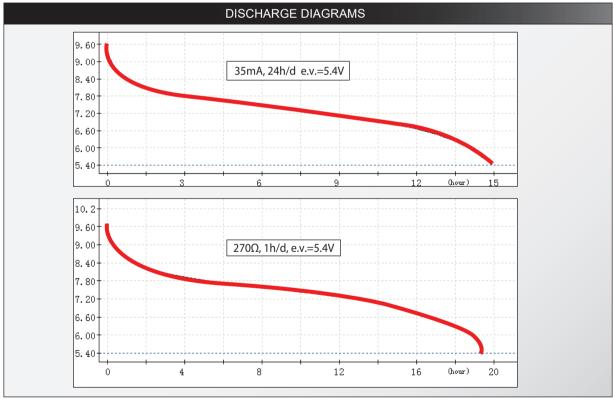

STANDARDS

EN 60086-1:2021 and EN 60086-2:2021 - Primary Batteries - Safety of batteries with aqueous electrolyte

Important Notice

This specification contains typical information specific to products manufactured at the time of publication. The data is subject to change and should be used for reference only. Contact FujiEnergy for the latest information.